


all data in mm  
1:2

**SOUND PRESSURE LEVELS - 60Vpp/1m**

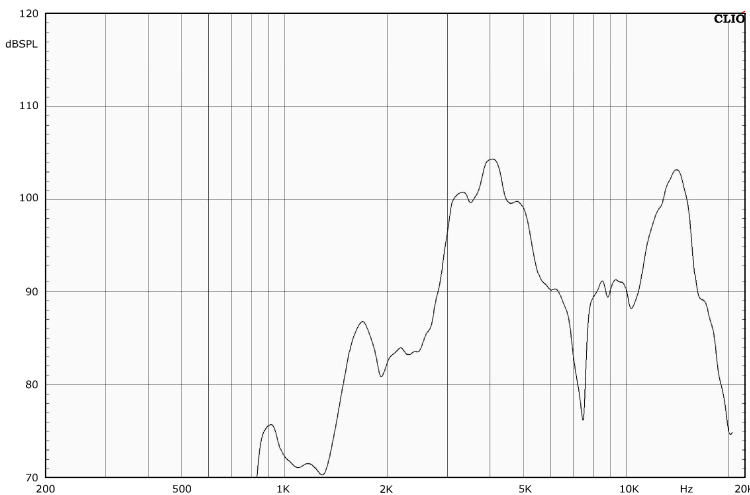

**SPECIFICATIONS**

PIEZO-CERAMIC IMPEDANCE	500 $\Omega$
MAX VOLTAGE	150Vpp
SPL/60Vpp/1m	104dB (4000Hz)
FREQUENCY RANGE	2800-6000Hz
OPERATING TEMP. RANGE*	-20°C +70°C
CASING MATERIAL	ABS
COLOUR	BLACK
NET WEIGHT	55g
DIMENSIONS	$\varnothing 78 \times 25$ mm
CONNECTIONS	lugs

**SHIPPING**

MASTER CARTON QUANTITY	168 pcs
PACKAGING	BOX 380x380x215mm

\*temperature range is dependent on the working condition of the piezoelectric ceramic.  
sample tested at 23°C.