


all data in mm
1:2

SOUND PRESSURE LEVELS - 60Vpp/1m

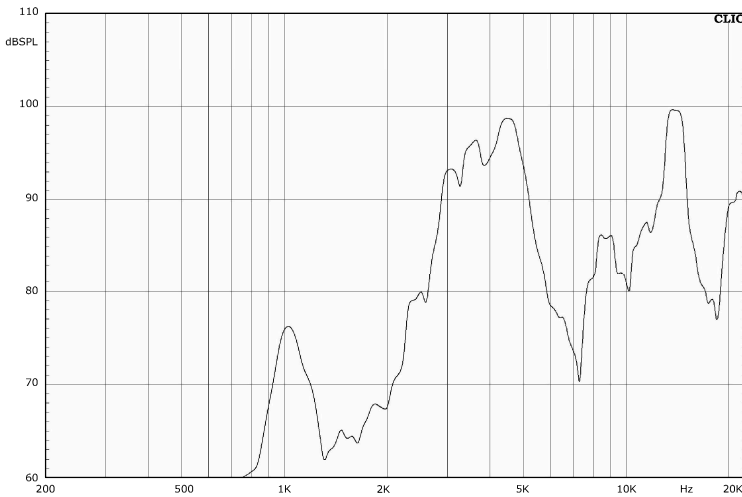

*temperature range is dependent on the working condition of the piezoelectric ceramic.
sample tested at 23°C.

SPECIFICATIONS

PIEZO-CERAMIC IMPEDANCE	500Ω
MAX VOLTAGE	150Vpp
FREQUENCY RANGE	3000-5000Hz
OPERATING TEMP. RANGE*	-20°C +70°C
CASING MATERIAL	PC
NET WEIGHT	20g
DIMENSIONS	Ø54,2x15mm
CONNECTIONS	lugs

SHIPPING

MASTER CARTON QUANTITY	500 pcs
PACKAGING	BOX 380x380x215mm