



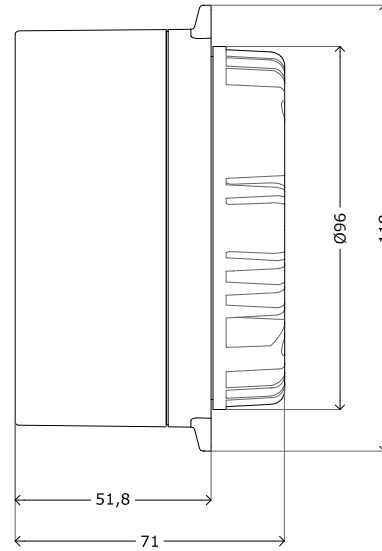

ISO 9001 CERTIFIED

# TE750


## neodymium horn speaker

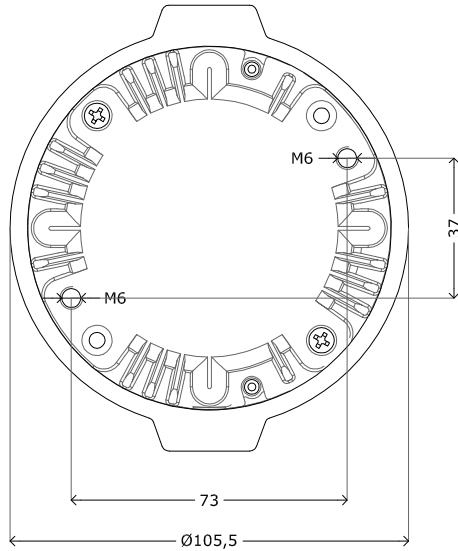

all data in mm  
1:2

### SOUND PRESSURE LEVELS - 1m/1W

sample tested: 8Ω

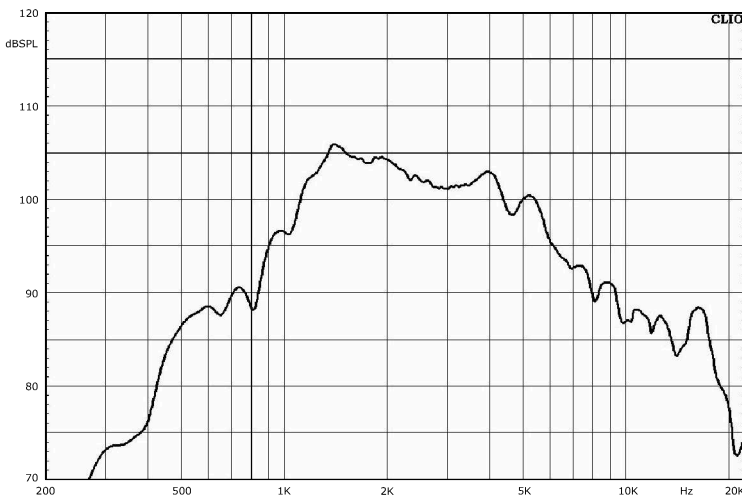

### SPECIFICATIONS

IMPEDANCE	4-8-16Ω
PHC (Power Handling Capacity)	50W
PEAK Power*	70W
SPL/1m/1w	105,5dB (1400Hz)
FREQUENCY RANGE	580-8000Hz

DIAPHRAGM MATERIAL	PHENOLIC
VOICE COIL DIMENSION	Ø51,55mm
MAGNET MATERIAL	NEODYMIUM
MAGNET SIZE	Ø58x6mm
CASING MATERIAL	NYLON
COLOUR	BLACK
NET WEIGHT	825g
DIMENSIONS	Ø105,5x118x71mm
IP RATING***	IP66

### OPTIONS

CONNECTIONS	wires-multiple cable
MAGNET	-
MATERIAL/COLOUR	-

### SHIPPING

MASTER CARTON QUANTITY	18 pcs
PACKAGING	BOX 330x230x220mm

\* usable power only for brief period, do not use this power as operating temperature.  
\*\*\* IP grade is guaranteed only in the fully assembled product with accessories.


sample tested at 23°C.



ISO 9001 CERTIFIED

# TE750


## accessories

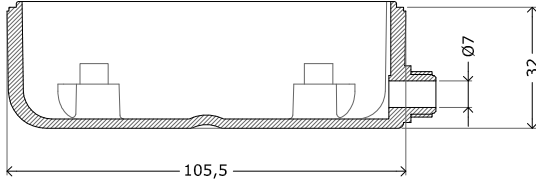

	<b>COVER 850 bassa</b>
DIMENSIONS	Ø105,5x32mm
USABLE SPACE	-
MATERIAL	NYLON
COLOUR	BLACK
OPTIONS*	-

*the plastic cover limits the dissipation of heat increasing magnet temperature.  
30W PHC suggested with plastic cover.*


*\* contact us for different configurations available*

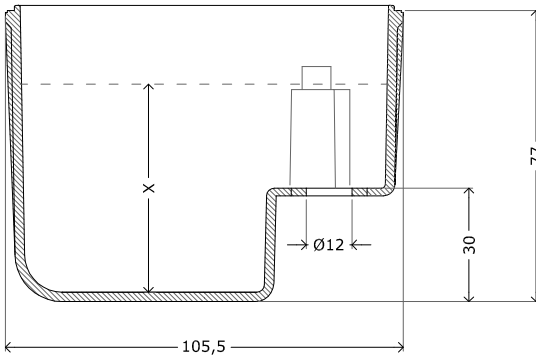

	<b>COVER 750-850 alta</b>
DIMENSIONS	Ø105,5x77mm
USABLE SPACE	55mm
MATERIAL	NYLON
COLOUR	BLACK
OPTIONS*	hole Ø12mm-16mm-20mm

*the plastic cover limits the dissipation of heat increasing magnet temperature.  
30W PHC suggested with plastic cover.*

*\* contact us for different configurations available*

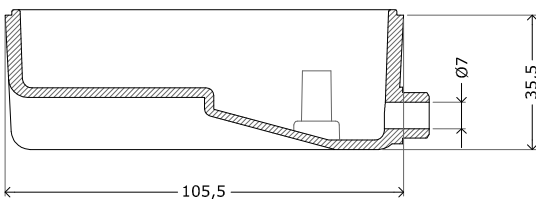

	<b>COVER 750 AL</b>
DIMENSIONS	Ø105,5x35,5mm
USABLE SPACE	-
MATERIAL	ALUMINUM
COLOUR	BLACK
OPTIONS	-

all data in mm  
1:2


ORING, SCREWS FOR COVER AND BRACKET AVAILABLE.  
CABLE GLANDS INCLUDED FOR COVER 850 bassa AND COVER 750 AL




ISO 9001 CERTIFIED

# TE750


## accessories

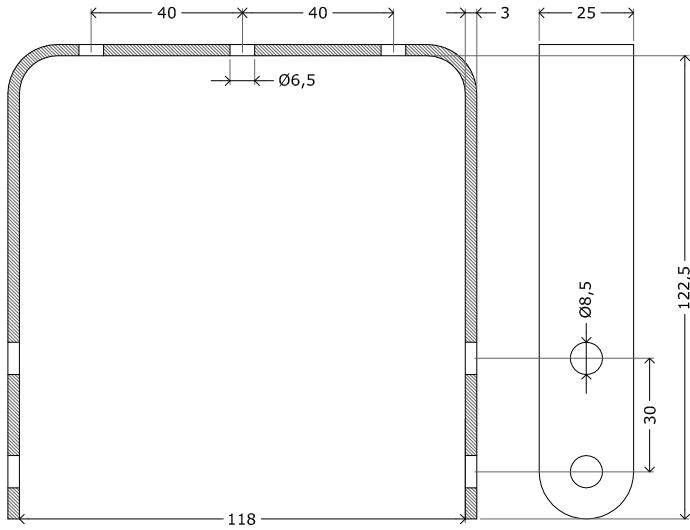

	<b>BRACKET 07</b>
MATERIAL	ZINC IRON
COLOUR	-

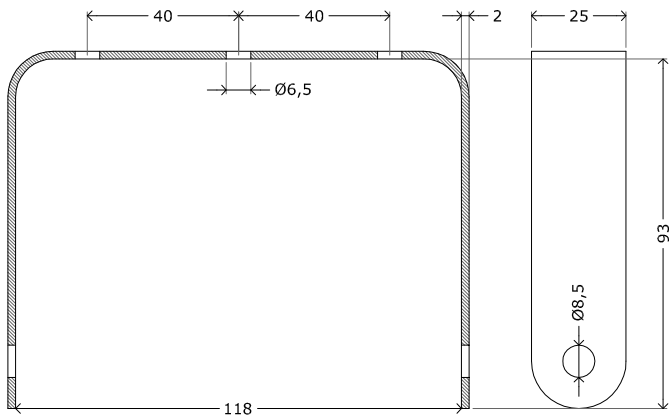

	<b>BRACKET 09</b>
MATERIAL	ZINC IRON
COLOUR	-

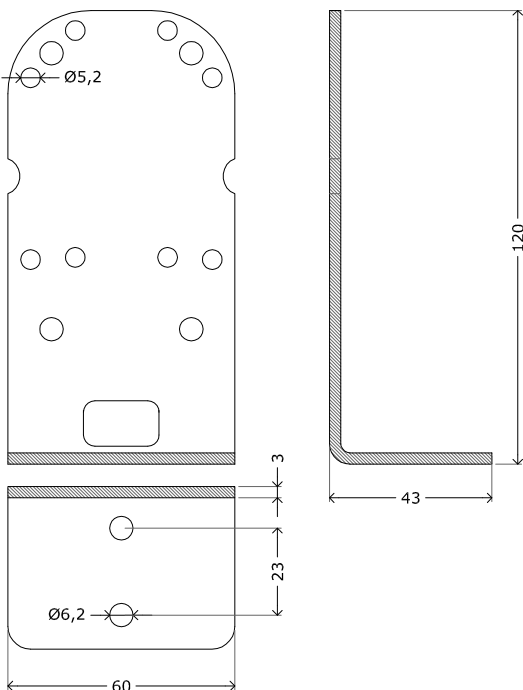

	<b>BRACKET L - only for AL cover</b>
MATERIAL	IRON
COLOUR	BLACK

all data in mm 1:2 ORING, SCREWS FOR COVER AND BRACKET AVAILABLE.  
CABLE GLANDS INCLUDED FOR COVER 850 bassa AND COVER 750 AL